



**Belvedere Spot Double F3, Floodlight 36 deg UL - Specification Sheet**  
**by Antonio Citterio w Toan Nguyen, 2007**

Mounting	Base on Ground
Lamp (Bulb) Description	6+6 x 1W 3000K 350mA Power LED
Environment	Outdoor - Wet location
Finish	Brown

**Technical and Product Description** BELVEDERE OUTDOOR for exterior lighting with protection degree IP55 thought for situations that require a strongly detailed light with an adjustable projector or with lighting areas of a certain size, such as car parks or external residential areas. Available in stick version or with double or single head. Installation on floor through the choice of specific accessories possible. Discharge lamps G12 35W (excluded).

The main components are made of low copper content aluminum alloy on which some galvanic treatments to protect against saline aggression have been applied.

Other important features are the presence of a watertight box with anti-humidity gel to connect to the power supply, apart from the watertight cable gland. Insulation Class I. Electronic ballast is included.

**Electrical**

IP Rating	IP55
-----------	------


**Physical**

Construction Material	Aluminum
Weight	6.28 lbs



FU090726 Brown

**Dimensional Image**

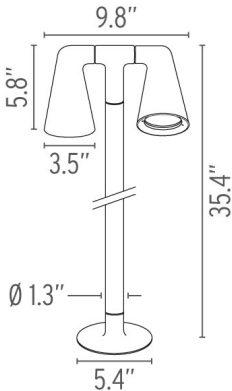

**Certifications**

